


A comparison of next-generation turbulence profiling instruments at Paranal

R. Griffiths,¹  L. Bardou,¹ T. Butterley,¹ J. Osborn,¹ R. Wilson,¹ E. Bustos,² A. Tokovinin,² M. Le Louarn,³ and A. Otarola⁴

¹Centre for Advanced Instrumentation, University of Durham, DH1 3LE, Durham, UK

²Cerro Tololo Inter-American Observatory — NSF's NOIRLab, Casilla 603, La Serena, Chile

³European Southern Observatory, Karl-Schwarzschild-Str. 2 85748 Garching bei München Germany

⁴European Southern Observatory, Alonso de Córdova 3107 Vitacura, Santiago de Chile, Chile

Accepted XXX. Received YYY; in original form ZZZ

ABSTRACT

A six-night optical turbulence monitoring campaign has been carried at Cerro Paranal observatory in February and March, 2023 to facilitate the development and characterisation of two novel atmospheric site monitoring instruments - the ring-image next generation scintillation sensor (RINGSS) and 24-hour Shack Hartmann image motion monitor (24hSHIMM) in the context of providing optical turbulence monitoring support for upcoming 20–40m telescopes. Alongside these two instruments, the well-characterised Stereo-SCIDAR and 2016-MASS-DIMM were operated throughout the campaign to provide data for comparison. All instruments obtain estimates of optical turbulence profiles through statistical analysis of intensity and wavefront angle-of-arrival fluctuations from observations of stars. Contemporaneous measurements of the integrated turbulence parameters are compared and the ratios, bias, unbiased root mean square error and correlation of results from each instrument assessed. Strong agreement was observed in measurements of seeing, free atmosphere seeing and coherence time. Less correlation is seen for isoplanatic angle, although the median values agree well. Median turbulence parameters are further compared against long-term monitoring data from Paranal instruments. Profiles from the three small-telescope instruments are compared with the 100-layer profile from the stereo-SCIDAR. It is found that the RINGSS and SHIMM offer improved accuracy in characterisation of the vertical optical turbulence profile over the MASS-DIMM. Finally, the first results of continuous optical turbulence monitoring at Paranal are presented which show a strong diurnal variation and predictable trend in the seeing. A value of 2.65'' is found for the median daytime seeing.

Key words: site testing – instrumentation: adaptive optics – atmospheric effects

1 INTRODUCTION

Atmospheric [optical turbulence \(OT\)](#) induces both phase distortion and amplitude modulation of light that propagates through it, leading to a severe reduction in achievable image quality from ground-based optical instruments. Large astronomical telescopes typically employ [adaptive optics \(AO\)](#) systems to compensate for the wavefront phase distortion, however there is a need for external monitoring of [OT](#) during the design, validation and commissioning of such systems. Additionally, knowledge of the vertical distribution of optical turbulence will be crucial for predicting and verifying the performance of [multi conjugate adaptive optics \(MCAO\)](#) systems planned for 20–40m ELT-class telescopes ([Costille & Fusco 2011](#); [Tokovinin 2010](#)). These systems will therefore demand instruments that measure both "integrated" parameters relevant to [AO](#) and the vertical distribution of optical turbulence. Turbulence monitoring instruments are today installed at many of the largest astronomical observatories, provid-

ing real-time measurements of turbulence conditions, ensuring that observational sensitivity requirements are met ([Milli et al. 2019](#)), and providing long-term site monitoring data which is highly desirable in the development of new optical instruments. Turbulence monitoring is also seen as increasingly important in improving the accuracy of meso-scale turbulence forecasting models ([Masciadri et al. 2020](#)), which offer further gains in efficiency for observation scheduling through the process of auto-regression ([Masciadri et al. 2023](#)) and will be highly beneficial to the operation of ELT-class instruments. The current standard, small-telescope [OT](#) monitoring instruments - the [Multi Aperture Scintillation Sensor \(MASS\)](#) and [Differential Image Motion Monitor \(DIMM\)](#) - are limited by the use of outdated CCD cameras, custom-manufactured equipment and, in the case of the [MASS](#), a noted discrepancy in measurements of [OT](#) profiles compared to the high-resolution [Stereo-Scintillation Detection and Ranging \(S-SCIDAR\)](#) technique ([Masciadri et al. 2014](#); [Lombardi & Sarazin 2016](#)). There is therefore significant motivation to develop new instruments based on modern technologies for deployment alongside ELTs.

* E-mail: ryan.griffiths@durham.ac.uk

The minimum requirement for such instruments is firstly accurate measurement of the astronomical seeing ε_0 . This parameter is directly related to the integrated turbulence strength of the atmosphere and represents the angular size of the seeing-limited (long-exposure) point spread function (PSF) for astronomical observations. The free atmosphere seeing, $\varepsilon_{0,f}$ is a measure of the seeing above an altitude of 500m (Lawrence et al. 2004) and enables a comparison of seeing decoupled from highly localised turbulence in the ground layer. Additional integrated turbulence parameters of interest include the coherence time, τ_0 , and coherence angle, θ_0 (Roddier 1981). These are relevant to the operation of AO systems, representing respectively an upper limit on the time taken to measure and correct wavefront distortions and an upper limit of the achievable angular correction. MCAO and laser tomographic adaptive optics (LTAO) systems planned for ELT-instruments will also require knowledge of the optical turbulence profile, as do forecasting models, in order to provide meaningful validation of techniques. Accurate measurement of the optical turbulence profile is therefore also highly desirable.

Multi-instrument campaigns have been hosted a number of times at the European Southern Observatory (ESO) Paranal site, including for example Dali Ali et al. (2010) and Osborn et al. (2018). This work details the results from the most recent campaign at Paranal, in which three turbulence profiling instruments based on portable telescopes: the 24-hour Shack-Hartmann image motion monitor (24hSHIMM), full aperture scintillation sensor (FASS) (Guesalaga et al. 2016) and ring-image next generation scintillation sensor (RINGSS) were compared with permanently installed OT profiling instruments at the site. The primary motivation being to facilitate the development and characterisation of these next-generation instruments against existing techniques. The three instruments were co-located on the northernmost part of the observatory for 6 nights starting on the 27th of February, with the final night of observation on the 5th of March 2023. The ESO Multi Aperture Scintillation Sensor - Differential Image Motion Monitor (MASS-DIMM) (Chiozzi et al. 2016) was operating throughout all nights of observation whereas the stereo-SCIDAR (Osborn & Sarazin 2018) was operated from the 28th to the 5th only. As a part of the VLT Atmospheric Site Monitoring (ASM) package, measurements of local meteorological parameters were available for additional analysis.

This work will outline the theoretical operating principle behind each instrument used in the campaign and present the major results from the campaign with discussion. The generalised FASS instrument is still under development and so its results have been excluded from this work. The measurements of the 24hSHIMM and RINGSS will be compared directly with the permanent instrumentation - the DIMM, MASS-DIMM and the S-SCIDAR - both on measurements of integrated parameters and on OT profiles using high-resolution vertical C_n^2 profiles obtained from the S-SCIDAR.

2 TURBULENCE PROFILING INSTRUMENTS

The concepts and capabilities of each of the instruments used during the campaign are briefly summarised below. For this campaign, the other ESO turbulence profiling instruments: the robotic Slope Detection and Ranging (SLODAR) instrument and the adaptive optics facility on UT-4, were not operational and so are omitted.

2.1 Stereo-SCIDAR

S-SCIDAR, which is described in detail in Shepherd et al. (2014), is a triangulation technique that exploits observations of binary stars with

a similar magnitude, requiring a telescope larger than 1-m diameter and low-noise camera due to the relative faintness of such targets, to measure the vertical distribution of OT in the atmosphere. The S-SCIDAR projects the pupil image from each star onto a separate CCD detector using a prism which yields sensitivity advantages over the typical SCIDAR implementation where the pupil images are overlapped on a single camera (Fuchs et al. 1998). The cross covariance of the spatial intensity fluctuations in the two pupil images is analysed to extract a high-resolution optical turbulence $C_n^2(h) dh$ profile comprised of 100 layers at 250m intervals. Additionally, by analysing the temporal evolution of the cross-covariance responses, it is possible to extract the wind velocity and direction of individual turbulent layers which enables estimation of the optical turbulence coherence time. The S-SCIDAR system at Paranal is mounted on one of the 1.8m auxiliary telescopes and has been extensively tested and validated against existing instrumentation at the site (Osborn et al. 2018). The S-SCIDAR data from this experiment has been processed using the latest corrections for finite spatial sampling described by Butterley et al. (2020a) which also includes subtraction of localised turbulence within the dome.

2.2 DIMM

The DIMM (Sarazin & Roddier 1990) consists of a small telescope with a CCD camera and a pupil-plane mask of two small circular apertures. Using a prism, the beams from the two apertures are imaged onto a detector and spatially separated. The seeing is measured by analysing the variance in differential position of the two focal spots (Tokovinin 2002). The DIMM is a simple, portable OT monitor and provides measurements of the seeing at one minute intervals. The Very Large Telescope (VLT) DIMM at Paranal is configured in a combined MASS-DIMM system mounted on a 28-cm Celestron C11 telescope and was installed as a part of the 2016 ASM upgrade on a 7-m tower. Limitations of the instrument include insensitivity to the bias introduced by optical propagation and only providing measurements of the seeing.

2.3 MASS

The MASS (Kornilov et al. 2003) is similarly based around a small-telescope and measures the normalised intensity fluctuations resulting from propagation through turbulence, commonly referred to as the scintillation index, in 4 concentric apertures. Using the theory described by Tokovinin et al. (2003), weighting functions are generated for the 10 (4 normal and 6 differential) scintillation indices at vertical heights of 0, 0.5, 1, 2, 4, 8, 16 km and an inversion algorithm is used to reconstruct the $C_n^2(h) dh$ of each layer. The VLT MASS is combined in a MASS-DIMM configuration (Kornilov et al. 2007). As the MASS relies solely on measurements of scintillation, it is insensitive to ground-layer turbulence which can be accounted for using simultaneous measurements from the DIMM. The techniques described by Kornilov (2011) allow for estimation of the OT coherence time by measurement of the atmospheric second moment of wind and combination with the DIMM data.

2.4 RINGSS

RINGSS is a solid-state turbulence profiler developed to replace the technically obsolete MASS instruments (Tokovinin 2021). It uses a 5-inch Celestron telescope where image of a bright single star is optically transformed into a ring. This is achieved by combination

of spherical aberration and defocus in the focal-reducer lens. The pixel scale is 1.57 arcsec and the ring radius is 11 pixels. Cubes of 2000 ring images of 48×48 pixel format and 1 ms exposure time are recorded by a CMOS camera. Image processing consists in centering the rings and computing 20 harmonics of intensity variation along the ring (in the angular coordinate). Variances of these harmonics, averaged over 10 image cubes, are related to the turbulence profile by means of weighting functions in the same way as in MASS. RINGSS delivers turbulence integrals in eight layers at 0, 0.25, 0.5, 1... 16 km heights. The results refer to zenith; they are corrected for the finite exposure time bias and partially corrected for deviations from the weak-scintillation regime (saturation). The atmospheric time constant is determined by the method of Kornilov (2011).

Scintillation signals in RINGSS are sensitive to the ground-layer turbulence because the image is not focused (analogue of a generalized SCIDAR). Alternative estimation of seeing is made using radial distortions of the rings, in analogy to a DIMM. The "sector" and "scintillation" seeing estimates agree well; here we use only the latter. The instrument operates robotically. Its control provides for selection and change of targets, pointing and centering, and closed-loop focus control.

2.5 24hSHIMM

The 24hSHIMM (Griffiths et al. 2023) is based around a Shack-Hartmann wavefront sensor (SHWFS) and portable 11-inch telescope design. It observes single, bright stars and measures both the intensity and wavefront angle-of-arrival (AoA) fluctuations in each of the SHWFS focal spots. The spatial statistics of the scintillation are compared with weighting functions (Robert et al. 2006) and a non-negative least squares algorithm is used to reconstruct a low-resolution $C_n^2(h) dh$ profile. The 24hSHIMM is not negatively-conjugated, therefore a scintillation-based reconstruction is insensitive to the ground layer and integrated turbulence strength measurements from SHWFS AoA fluctuations are used to overcome this limitation. The 24hSHIMM is designed to operate for 24-hours a day, typically through use of an InGaAs camera operating in the short-wave infrared to reduce sky background light and minimise the effects of strong turbulence. The 24hSHIMM does not operate at high frame rates to measure the coherence time, however instead it uses the estimate of the turbulence profile along with wind speed measurements from a local weather station and the vertical wind speed profile from the ERA5 ECMWF forecast (Hersbach et al. 2020) to obtain an estimate of the coherence time. A notable change from the original implementation of the 24hSHIMM is that in this work, measurements are obtained by a CMOS camera and a 600nm longpass filter which introduces additional constraints on performance.

2.6 Campaign details

The location of each instrument on the Paranal observatory platform is shown in Figure 1. The 24hSHIMM and RINGSS were mounted on concrete pillars adjacent to the 1998 DIMM tower within 2m of one-another. The FASS was mounted on a tripod slightly further away, between the old-DIMM tower and SLODAR crate. The 24hSHIMM was mounted approximately 2m off of the ground, the RINGSS and FASS were at about 1.5m. Wind breaks were set up along the Northern fence next to the instruments.

The local environments for the S-SCIDAR and MASS-DIMM are therefore significantly different; they are both much further away from any large buildings and more elevated from the ground. The

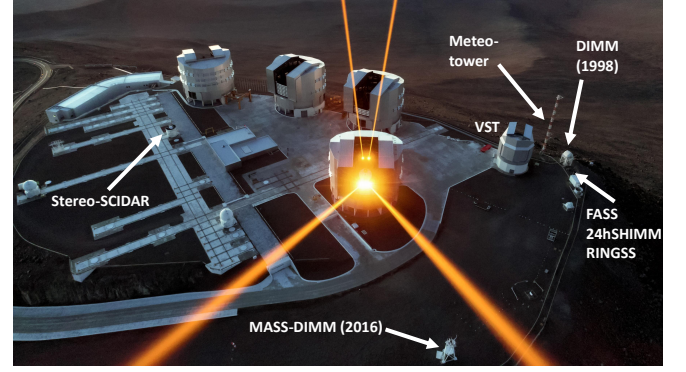


Figure 1. Location of turbulence monitoring instrumentation described in section 2. Image credit: ESO/G. Hüdepohl (atacamaphoto.com).

MASS-DIMM is on a 7 m tower and the S-SCIDAR was mounted on VLT auxiliary telescope two; the alt-az altitude axis of which is 5-m above surface (Koehler & Flebus 2000). We therefore expect poorer agreement in the seeing between these instruments and the monitors located near the VLT Survey Telescope (VST), as local turbulence conditions are likely to differ significantly.

The list of targets for the RINGSS was shared at the beginning of the experiment and efforts were made to synchronise target stars where possible between the visiting turbulence monitors. The MASS-DIMM and S-SCIDAR however were using separate target lists.

3 RESULTS

The overall results for this campaign are laid out below. This includes both direct comparison of integrated parameter measurements between the different instruments, and a comparison of optical turbulence profiles with the high-resolution S-SCIDAR. A focus is primarily made on comparison of the developmental instruments 24hSHIMM, RINGSS with the well-characterised and permanently installed S-SCIDAR and MASS-DIMM. However all instruments have been compared where appropriate. The comparison between 24hSHIMM and RINGSS is of interest as the two instruments were co-located, observing similar targets and so are much more likely to agree. The agreement of the S-SCIDAR and MASS-DIMM is also of interest to compare to long-term monitoring results and previous studies.

To generate comparison plots, for the instrument on the x-axis, each measurement has been directly plotted against the nearest measurement from the instrument on the y-axis within a maximum time difference of two minutes. If a corresponding measurement could not be found within two minutes the data point has been excluded from the plot to minimise the effects of temporal evolution of the turbulence on the comparison. Additionally, each of the instruments has a similar integration time of approximately 20-60 s which allows for direct comparison between data packets. In each comparison plot, a white dashed line represents the line of perfect agreement between the instruments, and the Pearson correlation coefficient, r , bias, B , unbiased root mean square error, RMSE, and mean ratio, MR, of each data set is reported in the top-left of the graph. Mathematical definitions of the latter three parameters may be found in appendix A. These comparison parameters are additionally summarised for each figure in an accompanying table. The colour gradient indicates the density of measurements at each point in the graph with black the

lowest and pale yellow the highest. The median values from these findings will also be compared to results from long-term studies on seeing conditions at Paranal with [Butterley \(2021\)](#) reporting the latest **S-SCIDAR** results and [Otarola \(2021\)](#) the results from the **MASS** and **DIMM**. These results can be found in table 1.

Finally, the distribution and temporal sequences of $C_n^2(h) dh$ profiles measured by the instruments will be directly compared with the **S-SCIDAR** through a binning process to investigate accuracy of **OT** profile characterisation, and the first results from the **24hSHIMM** of 24-hour continuous monitoring of **OT** at Paranal are presented in full.

3.1 Seeing

The astronomical seeing, ε_0 , describes the angular full-width-at-half-maximum (FWHM), typically measured in units of arcseconds, of the seeing-limited point spread function for long-exposure imaging through optical turbulence. It can be calculated using the Fried parameter r_0 ([Fried 1966](#)),

$$r_0 = \left[0.423k^2 \sec(\gamma) \int_0^\infty C_n^2(h) dh \right]^{-3/5}, \quad (1)$$

where $k = 2\pi/\lambda$ is the wavenumber, λ is the wavelength of the light, γ the zenith angle of observation in radians, h the altitude of a turbulent layer in metres, $C_n^2(h)$ the refractive index structure constant, given in units of $m^{-2/3}$. The relationship between the Fried parameter and the seeing is then given by

$$\varepsilon_0 = 0.98 \frac{\lambda}{r_0}. \quad (2)$$

Accurate measurement of the astronomical seeing is the most fundamental requirement of an optical turbulence monitor as it quantifies the integrated turbulence strength of the atmosphere and directly relates this to the degree of image distortion. From the median seeing measurements in table 1, it is immediately clear that the two instruments located in the northern end of the site, near to the VST and installed at a lower height above ground, are measuring stronger seeing than the **MASS-DIMM** and **S-SCIDAR**. This is most likely due to local turbulence effects. There is however a very strong agreement between the **DIMM** and **S-SCIDAR** measurements, and a mean ratio close to 1, despite their separation on the site — but noting their similar height above the ground and isolated locations this is not surprising.

It is known that the local seeing at the 1998-DIMM tower is slightly stronger than the current 2016-MASS-DIMM. The median seeing calculated from several years of measurements with the 1998-DIMM between 2010-01-01 and 2015-05-22 was found to be $0.98''$ compared to the 2016-DIMM long term seeing of $0.71''$. This supports a location-based argument for some of the discrepancy between the visiting and the **ESO** instruments. Previous campaigns using the Generalised Seeing Monitor at the same location have found seeing values of $0.88''$ ([Martin et al. 2000](#)) and $1.07''$ ([Dali Ali et al. 2010](#)). Additionally, high-resolution profiling of the surface layer carried out by [Butterley et al. \(2020b\)](#) using the surface-layer **SLODAR** identifies an exponentially decaying turbulence strength with altitude — hence we also expect the higher elevation of the **MASS-DIMM** and **S-SCIDAR** to result in lower seeing.

Individual comparisons of seeing measured by each instrument are displayed in figure 2. It is extremely encouraging that all seeing measurements display strong correlation with the minimum of $r = 0.70$ for the **RINGSS** compared with the **S-SCIDAR**. As expected, due to co-location and overlapping targets, the **24hSHIMM** and **RINGSS**

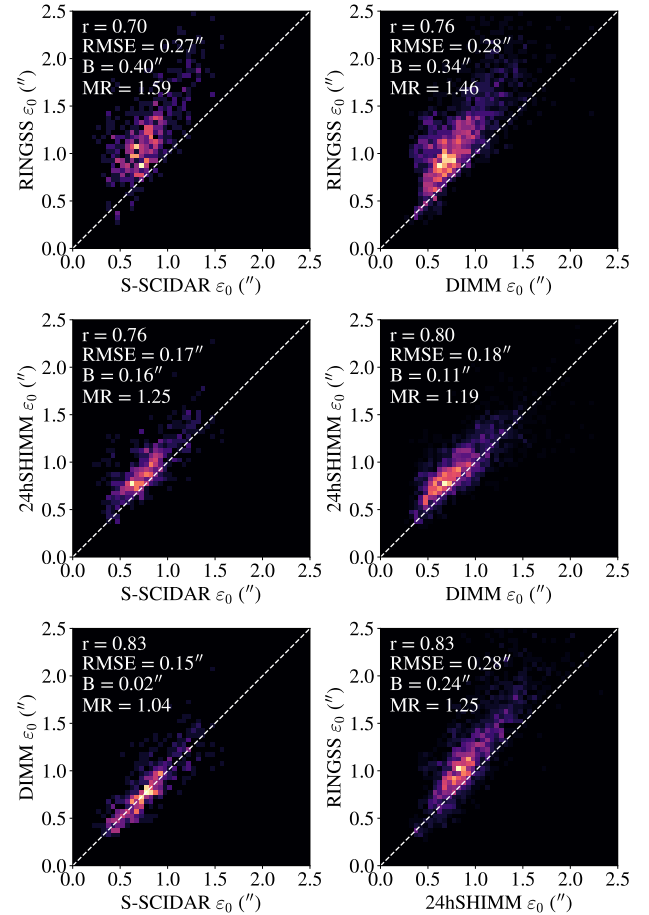


Figure 2. Comparison of contemporaneous seeing measurements during the campaign from the **DIMM**, **S-SCIDAR**, **24hSHIMM** and **RINGSS**.

display a very strong correlation of 0.83, however there is a significant bias between the two despite their proximity. A number of factors may contribute to this, including the **RINGSS** corrections for finite exposure time and partial saturation of scintillation - conditions which would lead to underestimates of fast-moving and high altitude turbulent layers on the **24hSHIMM** - there is also a small height offset between the two with the **RINGSS** being closer to the ground which could lead to slightly stronger turbulence above the telescope pupil. The correlation between the **DIMM** and **S-SCIDAR** is equally strong but with far less bias - the results are also consistent with the long term monitoring, as seen in table 1.

3.2 Free atmosphere seeing

The free atmosphere seeing, $\varepsilon_{0,f}$ is calculated as the integrated seeing of all turbulent layers with an altitude of 500 m or greater for the **MASS**, **RINGSS** and **S-SCIDAR**. The **24hSHIMM** is limited by a large sub-aperture size of 5 cm and cannot sample the highest frequency scintillation fluctuations produced by low-altitude turbulence. This is due to height scaling of the characteristic size of scintillation speckles - given by the radius of the first Fresnel zone, $r \approx \sqrt{\lambda z}$. It therefore lacks the sensitivity required to reconstruct a layer at 500 m, so a direct comparison with the other instruments is not possible and

Table 1. Median values of parameters obtained during this campaign, marked in the columns as ‘2023’, from all instruments are compared with long-term site monitoring results findings of [Otarola \(2021\)](#); [Butterley \(2021\)](#) with the column labels ‘long-term’. There are some blank entries which correspond to unavailable data - either because the instrument cannot measure the parameter or there is no source for long-term data. The median values for the **24hSHIMM** are calculated excluding data taken during the daytime.

Instrument	N Profiles	ε_0 (")		$\varepsilon_{0,f}$ (")		θ_0 (")		τ_0 (ms)	
	2023	Long-term	2023	Long-term	2023	Long-term	2023	Long-term	2023
DIMM	2696	0.71	0.75	-	-	-	-	-	-
MASS-DIMM	2477	-	0.79	0.41	0.40	1.98	2.53	6.14	6.3
S-SCIDAR	611	0.72	0.76	0.46	0.51	2.03	2.62	3.61	5.8
RINGSS	5387	-	1.10	-	0.58	-	2.46	-	5.8
24hSHIMM	1942	-	0.89	-	-	-	2.35	-	3.7

Table 2. Summary of statistical comparison parameters all graphs.

X - axis	Y - axis	r	RMSE	B	MR
Seeing, ε_0			(")	(")	
S-SCIDAR	RINGSS	0.70	0.27	0.40	1.59
DIMM	RINGSS	0.76	0.28	0.34	1.46
S-SCIDAR	24hSHIMM	0.76	0.17	0.16	1.25
DIMM	24hSHIMM	0.80	0.18	0.11	1.19
S-SCIDAR	DIMM	0.83	0.15	0.02	1.04
24hSHIMM	RINGSS	0.83	0.28	0.24	1.25
Free atmosphere seeing, $\varepsilon_{0,f}$			(")	(")	
S-SCIDAR	RINGSS	0.86	0.21	0.14	1.23
MASS-DIMM	RINGSS	0.85	0.22	0.14	1.36
S-SCIDAR	MASS-DIMM	0.80	0.17	-0.03	0.93
Isoplanatic angle, θ_0			(")	(")	
S-SCIDAR	RINGSS	0.35	0.67	-0.17	0.97
MASS-DIMM	RINGSS	0.40	0.59	-0.08	1.00
S-SCIDAR	24hSHIMM	0.40	0.67	-0.32	0.91
MASS-DIMM	24hSHIMM	0.33	0.65	-0.18	0.96
S-SCIDAR	MASS-DIMM	0.30	0.72	-0.19	0.97
24hSHIMM	RINGSS	0.54	0.53	0.11	1.08
Coherence time, τ_0			(ms)	(ms)	
S-SCIDAR	RINGSS	0.75	1.94	-0.05	1.00
MASS-DIMM	RINGSS	0.69	3.69	-0.82	0.96
S-SCIDAR	24hSHIMM	0.69	1.80	-2.81	0.59
DIMM	24hSHIMM	0.77	2.57	-3.24	0.58
S-SCIDAR	DIMM	0.70	2.10	0.25	1.05
24hSHIMM	RINGSS	0.84	2.13	2.69	1.72

it has been excluded. Figure 3 details the measurements obtained with the three other instruments.

3.3 Isoplanatic angle

The isoplanatic angle is defined by [Roddier \(1981\)](#) as

$$\theta_0 = \left[2.91 k^2 \cos^{-8/3}(\gamma) \int_0^\infty C_n^2(h) h^{5/3} dh \right]^{-3/5}. \quad (3)$$

This quantity is of particular interest for design and operation of **AO** systems as it represents the separation angle between a guide star and target which will result in 1 rad² RMS wavefront error for phase corrections. It is particularly of interest when considering

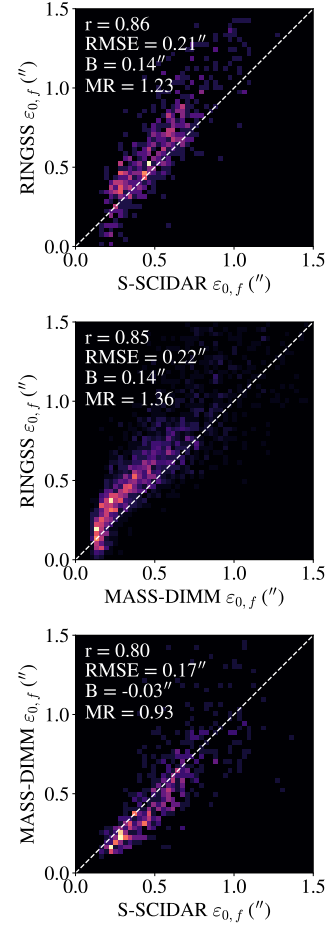


Figure 3. Comparison of contemporaneous free atmosphere seeing measurements during the campaign from the **MASS-DIMM**, **S-SCIDAR**, and **RINGSS**.

target availability in **single conjugate adaptive optics (SCAO)** and in calculation of **AO** error budgets.

Figure 4 displays the comparisons of isoplanatic angle measured by all instruments. Unlike measurements of the seeing, it is observed that there is less correlation between all instruments. However, the variation of isoplanatic angle during the campaign was small. The strongest correlation, 0.54, is found between **24hSHIMM** and **RINGSS** which observed same targets, while other profilers sampled different turbulent volumes. The $h^{5/3}$ scaling in Eq. 3 implies that

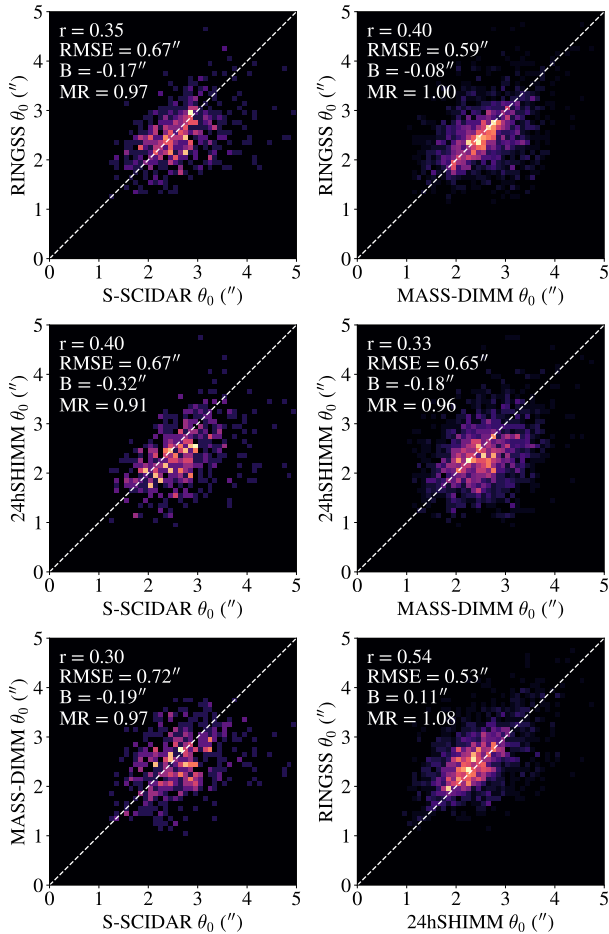


Figure 4. Comparison of contemporaneous isoplanatic angle measurements during the campaign by the **MASS-DIMM**, **S-SCIDAR**, **24hSHIMM** and **RINGSS**.

this parameter is highly sensitive to turbulence in the upper atmosphere. Therefore an accurate characterisation will require sensitivity to high-altitude turbulence. The **24hSHIMM**, **RINGSS** and **MASS** are limited in this regard by their response functions for the highest altitude layer which are several kilometres wide. The turbulence distributed over this layer will be averaged and reported at that height, leading to a reduction in accuracy. When taking optical propagation into account for observing at lower zenith angles, saturation of scintillation produced by the highest-altitude layers is an additional source of error for monitors based on weak-scintillation theory. The exception in this experiment being the **RINGSS** and **MASS** which implement a correction process. This combination of factors is likely to explain the smaller correlation observed in measurements from the four instruments, while the median values agree fairly closely.

3.4 Coherence time

Knowledge of the coherence time is essential for **AO** as it defines the minimum bandwidth of the system. The optical turbulence coherence time is typically on the scale of a few ms. It is related to the wind speed profile and turbulence strength in the following way (Roddier

1981),

$$\tau_0 = 0.314 \frac{r_0}{\bar{V}_{5/3}}, \quad (4)$$

where $\bar{V}_{5/3}$ is the weighted mean of the wind speed raised to the power of $5/3$,

$$\bar{V}_{5/3} = \left[\frac{\int_0^\infty V(h)^{5/3} C_n^2(h) dh}{\int_0^\infty C_n^2(h) dh} \right]^{3/5}. \quad (5)$$

The instruments in this study employ a variety of strategies to measure the coherence time. The **S-SCIDAR** analyses the spatio-temporal cross-correlations of the scintillation measured in the pupil. Peaks that match atmospheric layers translate across the auto-covariance map with each successive time offset due to translation of the turbulent layers with wind. The direction and speed of each of the layers is recorded and the mean wind speed calculated from Eq. 5. The **S-SCIDAR** is only able to directly estimate the wind speed of the strongest layers. Weak layers with no detected wind speed are assigned a value through interpolation of the measured wind speed profile.

The **24hSHIMM** takes a different approach, utilising measurements of the $C_n^2 dh$ profile, atmospheric wind speeds from the ECMWF ERA-5 reanalysis binned to the **24hSHIMM** profile layers with the wind speed for the ground layer bin replaced by wind speed measured from a local weather station which typically has a higher temporal resolution. The **MASS-DIMM** and **RINGSS** utilise the method described in Kornilov (2011) of including a wind shear component in the weighting functions, continuous exposures without gaps, and a fitting process to estimate the second moment of the wind \bar{V}_2 with the approximation of $\bar{V}_2 \approx 1.1\bar{V}_{5/3}$ found by Kellerer & Tokovinin (2007) enabling an estimate of the coherence time.

Figure 5 displays comparisons of coherence time measurements for the four instruments. The **RINGSS** and **MASS** use the same method of calculating coherence time and agree strongly with little bias. The two instruments also agree well with the **S-SCIDAR**, again with little bias. The **24hSHIMM** technique however displays poorer agreement with the other three instruments which may be expected given the limited temporal resolution of forecast data. The coherence time is also biased towards smaller values, which is reflected in the median measurement given in Table 1, however the correlation remains strong with the **MASS-DIMM** and **RINGSS**.

3.5 Optical turbulence profiles

Optical turbulence profiles are characterised by the refractive index structure constant C_n^2 as a function of vertical height above the ground. The instruments in this study record the sum of C_n^2 over a given volume dh for each layer using an inversion process. To facilitate a comparison between all instruments which use different models and layers, the **RINGSS**, **MASS-DIMM** and **24hSHIMM** are directly compared with the high-resolution **S-SCIDAR** profiles through binning using instrument response functions.

The response functions dictate the measured $C_n^2(h) dh$ response to a single, thin turbulent layer placed at any height throughout the atmosphere. These functions are typically evaluated in simulation by passing a single, thin layer from the ground to the upper atmosphere and plotting the $C_n^2(h) dh$ measured by the instrument in each altitude bin. For scintillation-based instruments such as **RINGSS**, **S-SCIDAR** and **MASS** the response functions usually manifest as triangles on a log scale of height, centred on the altitude of the turbulent layer re-

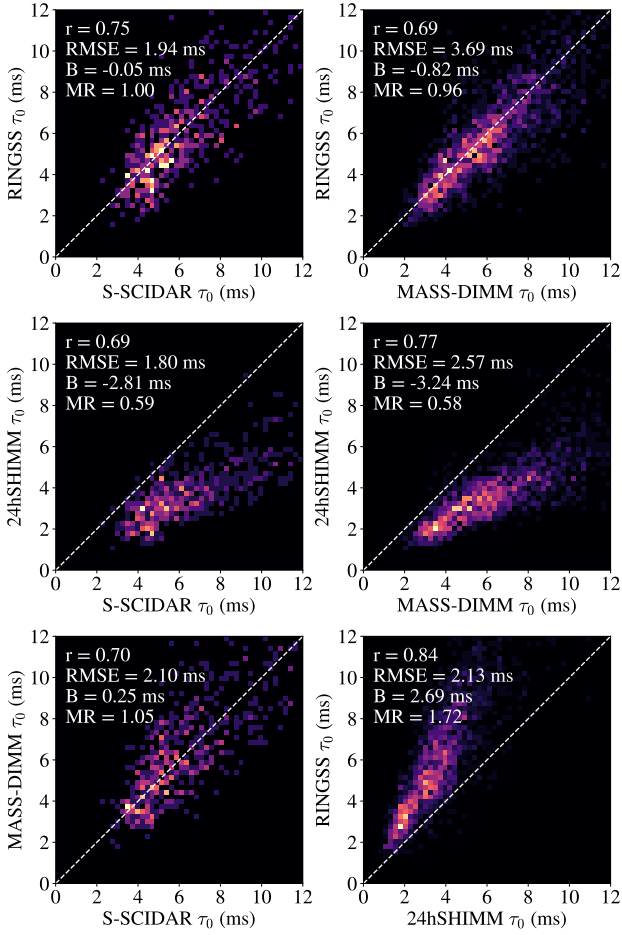


Figure 5. Comparison of contemporaneous measurements of the atmospheric turbulence coherence time by the **MASS-DIMM**, **S-SCIDAR**, **24hSHIMM** and **RINGSS**.

constructed and crossing adjacent bins at half of the input turbulence strength (Tokovinin et al. 2003; Tokovinin 2021).

For the **24hSHIMM**, this approximation also holds well, except for between the ground layer and the first layer. The response functions $f_i(h)$ for the **24hSHIMM** and **RINGSS** are displayed in Figure 6 on a linear scale of height. These instruments, as well as **MASS**, estimate turbulence strength in discrete layers as $C_n^2(h_i)dh = \int f_i(h)C_n^2(h)dh$. The response functions for the **MASS** can be found in Kornilov et al. (2003).

Figure 7 displays a box and whisker plot of optical turbulence profile measurements from the **24hSHIMM**, **RINGSS** and **MASS-DIMM** compared with contemporaneous **S-SCIDAR** profiles. The **S-SCIDAR** profiles have been binned down to the instrument layers using the response functions and only data within ± 2 minutes of an **S-SCIDAR** measurement have been used. The whiskers represent the 5th and 95th percentiles of the distribution, the median is shown as a dashed black line and the mean as a solid magenta line. It is therefore possible to simultaneously compare mean profiles and distributions of measurements in individual layers. Figure 7 indicates that all instruments measure a significantly stronger ground layer than the equivalent **S-SCIDAR** measurement.

A notable feature of the **MASS-DIMM** profile is a significant underestimation in the 8 km layer, which appears to be the driving

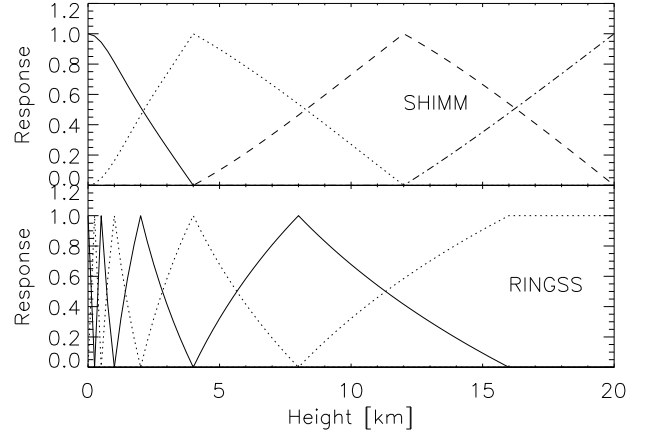


Figure 6. A plot of the response functions for the **24hSHIMM** and **RINGSS**. The alternating line styles differentiate the response functions of each reconstructed layer. The sum of responses from all layers is approximately one.

cause of the smaller value of median free-atmosphere seeing. For **RINGSS** and the **24hSHIMM**, some layers register zero $C_n^2(h)dh$, hence anomalous boxes and whiskers such as the 4km layer for the **24hSHIMM** and 2 km layer in **RINGSS** on a log-scale of $C_n^2(h)dh$. Mean values however agree well for the free-atmosphere layers.

Figure 8 shows a detailed comparison between vertical turbulence profiles measured by **RINGSS** with all 611 available **S-SCIDAR** profiles matched in time and resolution. Despite different locations and different target sources, we note a strong agreement of timing and localisation of strong turbulence packets, especially in the 0.5 and 1-km layers. The ground layer is not included in this comparison. Figure 9 shows a similar plot for the **24hSHIMM**. It suggests that the correlation between lower-altitude layers is higher than for high-altitude layers, evidencing the low correlation in isoplanatic angle.

3.6 Day and night measurements

The **24hSHIMM** measures **OT** profiles continuously for 24-hours a day by operating at short-wave infrared wavelengths. Compared to the visible light, this extends the validity of the weak-scintillation assumption and reduces the sky background. Additional techniques for rapid background subtraction (Griffiths et al. 2023) are also employed to ensure accurate photometry.

Figure 10 shows a continuous plot of the three main integrated turbulence parameters estimated by the **24hSHIMM**: seeing, isoplanatic angle and coherence time. Because the instrument produced a measurement every 1-2 minutes, for presentation purposes the data have been binned such that each data point represents the average of any measurements that fall into ten-minute bins. The sharp diurnal variation in seeing is immediately evident from the graph, with a repetitive, sharp drop in the seeing after sunset leading to the best conditions in earliest part of the night. The general trend thereafter appears to be a gradual increase in the seeing until just after sunrise where it rises very strongly. More work is needed to understand the underlying processes behind this behaviour and the influence of meteorological parameters.

The median value of the daytime seeing, calculated between sunrise and sunset, was found to be $2.65''$, isoplanatic angle $2.05''$ and coherence time 1.5 ms. It is notable that measurements of the isoplanatic angle, which is insensitive to low-altitude turbulence, do not experience the same distinct variation. This suggests that the in-

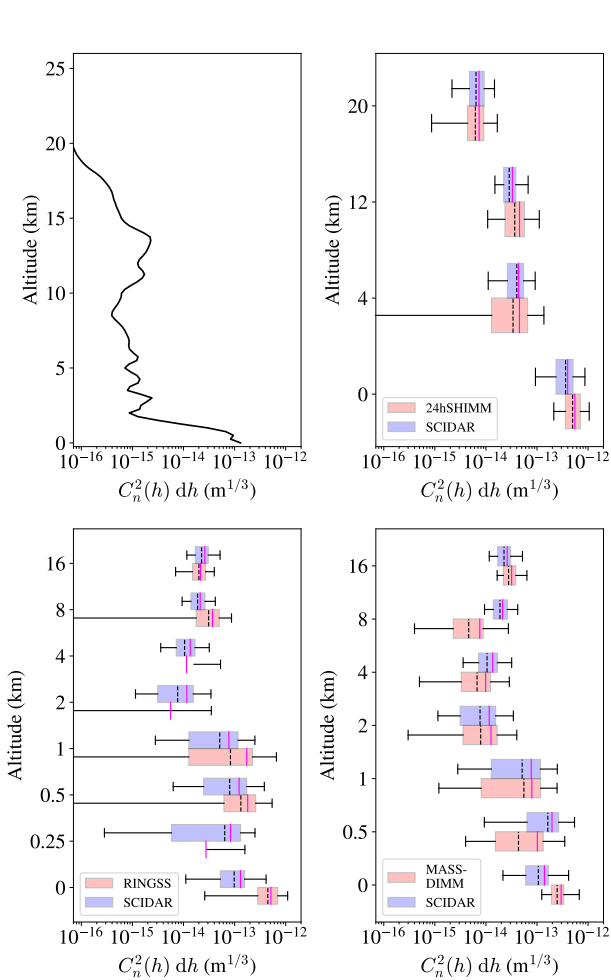


Figure 7. A comparison of $C_n^2(h) dh$ profile measurements for all instruments with contemporaneous measurements from the **S-SCIDAR**. The red boxes show the instrument data from each fitted layer, and the adjacent blue boxes the contemporaneous measurements (within \pm two minutes) from the **S-SCIDAR** which have been binned to match the instrument layers using the response functions. The extent of coloured boxes represents the first and third quartiles, the dashed line the median measurement, the magenta line the mean, and the whiskers the fifth and 95th percentiles of the distribution. From top left to bottom right, the plot shows the mean **S-SCIDAR** profile, and box and whisker plots for the **24hSHIMM**, **RINGSS** and **MASS-DIMM** compared with **S-SCIDAR**. Significantly smaller values in the top-left panel, compared to other panels, are explained by the thinner $dh = 0.25$ km layers of the **S-SCIDAR** profiles.

creased turbulence strength during daytime is a result of solar heating at the ground affecting the boundary layer, and the upper atmosphere is relatively unaffected. The coherence time follows a similar trend to the Fried parameter likely due to dominance of the strong ground layer turbulence.

4 CONCLUSIONS

An optical turbulence monitoring campaign has been carried out at Cerro Paranal observatory between the 27th February and 5th March 2023. The aim of this study was to characterise novel turbulence monitoring instruments, the **24hSHIMM** and **RINGSS**, against existing instruments at the site through comparison measurements of

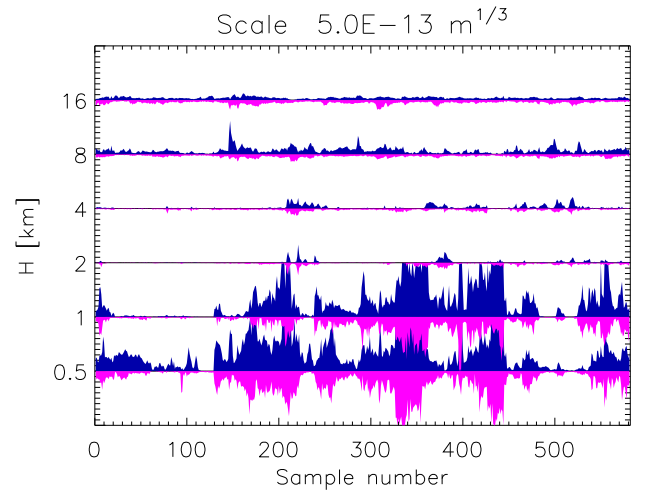


Figure 8. Turbulence profiles measured simultaneously by **RINGSS** (up-facing blue bars) and **S-SCIDAR** (down-facing magenta bars). **S-SCIDAR** is matched in resolution and time to **RINGSS** with the sample number indicating the n th **S-SCIDAR** measurement taken during the campaign. The width of each band is $5 \times 10^{-13} \text{m}^{1/3}$.

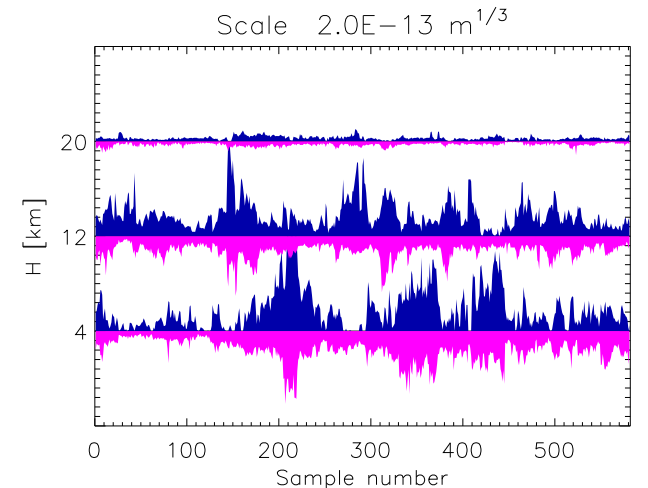


Figure 9. Turbulence profiles measured simultaneously by **24hSHIMM** (up-facing blue bars) and **S-SCIDAR** (down-facing magenta bars). **S-SCIDAR** is matched in resolution and time to **24hSHIMM** with the sample number indicating the n th **S-SCIDAR** measurement taken during the campaign. The width of each band is $2 \times 10^{-13} \text{m}^{1/3}$.

vertical **OT** profiles and integrated parameters including the seeing, free-atmosphere seeing, isoplanatic angle and coherence time.

Data collected from these two instruments during the campaign were further compared against measurements from the **S-SCIDAR** and the **MASS-DIMM** by assessing the RMSE, bias and correlation of contemporaneous data from pairs of instrument. Additionally median values from the whole campaign were calculated and compared to long-term averages.

It was found, as in previous campaigns, that the seeing measured near the old 1998-DIMM tower are significantly larger than for the **S-SCIDAR** and 2016-**MASS-DIMM**. In general, however, strong correlation is found across all seeing and free-atmosphere seeing measurements. Isoplanatic angle measurements display a good agreement in median values, but are less correlated between all instruments, which is likely to be a result of limitations in sensitivity

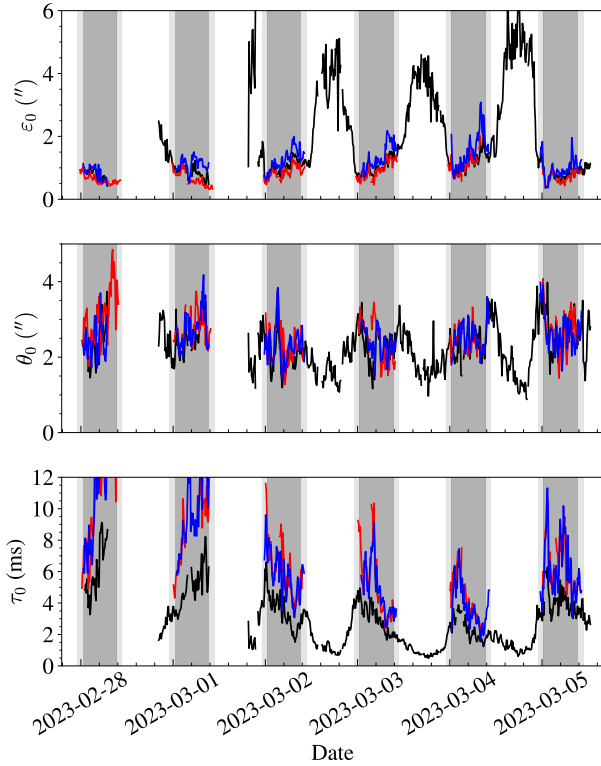


Figure 10. Integrated parameters measured by the 24hSHIMM during the campaign. The black line represents 24hSHIMM measurements, the red line DIMM measurements for seeing and MASS-DIMM for the coherence time and isoplanatic angle, and the blue line the RINGSS. All data sets have been binned to 10-minute intervals for presentation and dates are in UTC. The white, grey and light grey shades of the background represent daytime, night and twilight respectively

to high altitude turbulence and difference in the sampled turbulence volumes. Coherence time measurements are strongly correlated between all instruments, although the 24hSHIMM technique of using wind speed measurements from meteorological forecast data appears to strongly underestimate the coherence time.

The accuracy of OT profiling is also investigated by comparison of profiles with contemporaneous S-SCIDAR measurements binned using instrument response functions. The two visiting instruments are found to agree well with the S-SCIDAR, with expected bias towards stronger turbulence in the ground layer. It was also observed that the MASS-DIMM systematically underestimates in the 8 km layer.

Finally, the first measurements of continuous optical turbulence parameters at Paranal are presented which indicate a predictable and extreme diurnal variation in seeing with a median daytime value of 2.65'' compared to equivalent night-time median of 0.88'', which is assumed to be driven by changes in the boundary layer due to solar heating in the early morning and rapid cooling in the evening as similar changes are not present in the isoplanatic angle which is sensitive to high altitude turbulence. This experiment suggests that the best seeing conditions are in the earliest part of the night.

ACKNOWLEDGEMENTS

The turbulence monitor field campaign at Paranal was performed under the resources allocated by ESO in the Technical Time Request TTR-110.0010. The authors would also like to thank Jose Velasquez for operating the Stereo-SCIDAR during the experiment, and AO and ML for their hard work in organising and hosting the campaign. RG acknowledges his Science and Technology Facilities Council studentship 2419794 and funding for the 24hSHIMM development under UK Research and Innovation (MR/S035338/1).

DATA AVAILABILITY

RINGSS, 24hSHIMM and S-SCIDAR data may be found in the accompanying supplementary file. MASS-DIMM data is available from the ESO ASM archive ¹.

REFERENCES

- Butterley T., 2021, Technical report, SCIDAR reprocessing: part of the MASS reprocessing investigation part 2b. ESO, Durham University
- Butterley T., Sarazin M., Le Louarn M., Osborn J., Farley O. J. D., 2020a, in Schmidt D., Schreiber L., Vernet E., eds, Adaptive Optics Systems VII. SPIE, p. 75, doi:10.1117/12.2562559
- Butterley T., Wilson R. W., Sarazin M., Dubbeldam C. M., Osborn J., Clark P., 2020b, *Monthly Notices of the Royal Astronomical Society*, 492, 934
- Chiozzi G., Sommer H., Sarazin M., Bierwirth T., Dorigo D., Vera Sequeiros I., Navarrete J., Del Valle D., 2016, p. 991314, doi:10.1117/12.2232302, <http://proceedings.spiedigitallibrary.org/proceeding.aspx?doi=10.1117/12.2232302>
- Costille A., Fusco T., 2011, in AO for ELT 2011 - 2nd International Conference on Adaptive Optics for Extremely Large Telescopes.
- Dali Ali W., et al., 2010, *Astronomy & Astrophysics*, 524, A73
- Fried D. L., 1966, *Journal of the Optical Society of America*, 56, 1372
- Fuchs A., Tallon M., Vernin J., 1998, *Publications of the Astronomical Society of the Pacific*, 110, 86
- Griffiths R., Osborn J., Farley O., Butterley T., Townson M. J., Wilson R., 2023, *Optics Express*, 31, 6730
- Guesalaga A., Perera S., Osborn J., Sarazin M., Neichel B., Wilson R., 2016, p. 99090H, doi:10.1117/12.2232012, <http://proceedings.spiedigitallibrary.org/proceeding.aspx?doi=10.1117/12.2232012>
- Hersbach H., et al., 2020, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999
- Kellerer A., Tokovinin A., 2007, *Astronomy & Astrophysics*, 461, 775
- Koehler B., Flebus C., 2000, p. 13, doi:10.1117/12.390206, <http://proceedings.spiedigitallibrary.org/proceeding.aspx?doi=10.1117/12.390206>
- Kornilov V., 2011, *Astronomy & Astrophysics*, 530, A56
- Kornilov V., Tokovinin A. A., Vozyakova O., Zaitsev A., Shatsky N., Potanin S. F., Sarazin M. S., 2003, in Wizinowich P. L., Bonaccini D., eds, Adaptive Optical System Technologies II. p. 837, doi:10.1117/12.457982, <http://proceedings.spiedigitallibrary.org/proceeding.aspx?doi=10.1117/12.457982>
- Kornilov V., Tokovinin A., Shatsky N., Voziakova O., Potanin S., Safonov B., 2007, *Monthly Notices of the Royal Astronomical Society*, 382, 1268
- Lawrence J. S., Ashley M. C., Tokovinin A., Travouillon T., 2004, *Nature*, 431
- Lombardi G., Sarazin M., 2016, *Monthly Notices of the Royal Astronomical Society*, 455

¹ <http://archive.eso.org/cms/eso-data/ambient-conditions.html>

- Martin F., Conan R., Tokovinin A., Ziad A., Trinquet H., Borgnino J., Agabi A., Sarazin M., 2000, *Astronomy and Astrophysics Supplement Series*, 144
- Masciadri E., Lombardi G., Lascaux F., 2014, *Monthly Notices of the Royal Astronomical Society*, 438, 983
- Masciadri E., Martelloni G., Turchi A., 2020, *Monthly Notices of the Royal Astronomical Society*, 492, 140
- Masciadri E., Turchi A., Fini L., 2023, *Monthly Notices of the Royal Astronomical Society*, 523, 3487
- Milli J., et al., 2019, in AO4ELT 2019 - Proceedings 6th Adaptive Optics for Extremely Large Telescopes.
- Osborn J., Sarazin M., 2018, *Monthly Notices of the Royal Astronomical Society*, 480, 1278
- Osborn J., et al., 2018, *Monthly Notices of the Royal Astronomical Society*, 478, 825
- Otarola A., 2021, Technical report, Paranal Observatory site: Long-term statistics of optical turbulence, PWV and meteorological conditions. ESO
- Robert C., Conan J.-M., Michau V., Fusco T., Vedrenne N., 2006, *Journal of the Optical Society of America A*, 23, 613
- Roddier F., 1981, *Progress in Optics*, 19, 281
- Sarazin M., Roddier F., 1990, *Astronomy and Astrophysics*, 227, 294
- Shepherd H. W., Osborn J., Wilson R. W., Butterley T., Avila R., Dhillon V. S., Morris T. J., 2014, *Monthly Notices of the Royal Astronomical Society*, 437, 3568
- Tokovinin A., 2002, *Applied Optics*, 41, 957
- Tokovinin A., 2010, in 1st AO4ELT conference - Adaptive Optics for Extremely Large Telescopes. EDP Sciences, Les Ulis, France, p. 02005, doi:10.1051/ao4elt/201002005, <http://ao4elt.edpsciences.org/10.1051/ao4elt/201002005>
- Tokovinin A., 2021, *Monthly Notices of the Royal Astronomical Society*, 502, 794
- Tokovinin A., Kornilov V., Shatsky N., Voziakova O., 2003, *Monthly Notices of the Royal Astronomical Society*, 343, 891

APPENDIX A: STATISTICAL COMPARISON PARAMETERS

In this section, the equations for statistical comparison parameters used in figures 2-5 and tables 2-5 are defined. In all equations $i = 1, 2, 3 \dots N$ indicates a sample of N independent turbulence parameter measurements, X_i the measurement of the parameter by instrument X and Y_i the contemporaneous measurement of the parameter by instrument Y . The bias, B is defined as

$$B = \sum_{i=1}^N \frac{Y_i - X_i}{N}, \quad (\text{A1})$$

the root mean square error (with bias subtracted), or RMSE, as

$$\text{RMSE} = \sqrt{\sum_{i=1}^N \frac{([Y_i - \bar{Y}_i] - [X_i - \bar{X}_i])^2}{N}}, \quad (\text{A2})$$

where \bar{Y}_i, \bar{X}_i are the means of the contemporaneous measurements, and the mean ratio by

$$\text{MR} = \frac{1}{N} \sum_{i=1}^N \frac{Y_i}{X_i}. \quad (\text{A3})$$

This paper has been typeset from a $\text{\TeX}/\text{\LaTeX}$ file prepared by the author.